







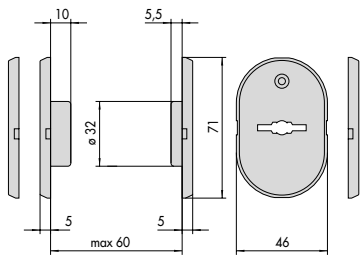



































Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	- Polished brass internal hole cover - For double bit key locks		0,029	12	1	06081	01	0	
	Outside brass escutcheon	1 06119 00 0, 1 06142 00 0, 57000	0,030	12	1	06082	00	0	
	- Polished brass key guide - For double bit key locks		0,041	5	1	06123	04	0	
	- Nylon key guide supplied with 7 spacers - For double bit key locks		0,050	1	1	06142	01	0	
	Key guide with nylon flange supplied with twelve spacers	1 57500 08 0, 1 57505 08 0, 1 57510 08 0, 1 57515 08 0	0,061	1	1	06142	02	0	
	Nylon spacer for key guide series 06142 and 06123		0,003	100	1	06142	50	0	
	Nylon spacer for key guide series 06144 and 06145		0,004	100	1	06142	51	0	
	Inside brass escutcheon with plug	57000	0,032	12	1	06143	00	0	







Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	Polished brass escutcheon with key guide	57290, 57291, 57296, 57831, 57833, 57835, 57837, 57851, 57853, 57855, 57857	0,105	1	1	06144	10	1	
	- Nylon key guide, including 2 supports for escutcheon and 3 spacers - For double bit key locks		0,066	1	1	06144	15	0	
	- Polished brass cover for escutcheon and key guide - AVAILABLE FINISHES: Polished chrome (fin.18) Anodized light bronze (fin.64) Anodized dark bronze (fin.65)	1 06144 10 1, 1 06144 15 0	0,030	50	1	06144	50	1	
	- Polished brass escutcheon with key guide - For double bit key locks - AVAILABLE FINISHES: Polished brass (fin.00) Polished chrome (fin.18) Anodized light bronze (fin.64) Anodized dark bronze (fin.65)		0,135	6	1	06145	10	0	
	- Nylon key guide, including 2 supports for escutcheon and 3 spacers - For double bit key locks		0,135	6	1	06145	15	0	
	- Polished brass escutcheon with key guide - For double bit key locks - AVAILABLE FINISHES: Polished brass (fin.00) Polished chrome (fin.18) Anodized light bronze (fin.64) Anodized dark bronze (fin.65)		0,130	6	1	06145	11	0	




Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	- Set of brass cover for escutcheon item 1.06145.00.0 - AVAILABLE FINISHES: Polished brass (fin.00) Polished chrome (fin.18) Anodized light bronze (fin.64) Anodized dark bronze (fin.65)		0,071	6	1	06145	50	0	
	- Nickel-plated steel flat striker - For 28 mm.dead-bolt locks distance		0,132	1	1	06220	00	0	
	- Nickel-plated steel flat striker - For 28 mm.dead-bolt locks distance		0,250	1	1	06220	02	0	
	Nickel-plated steel flat striker	1 06434 00 0, 1 06434 02 0	0,169	1	1	06220	03	0	
	- Nickel-plated steel flat striker - For double hole locks		0,239	12	1	06220	05	0	
	- Nickel-plated steel flat striker - For electric locks	15510,15515, 15530,15535, 17510,17515, 17530,17535	0,132	1	1	06220	20	0	
	- Nickel-plated steel faceplate 28 mm. dead-bolt distance	57500	0,297	1	1	06221	00	0	
	- Nickel-plated steel faceplate 28 mm. dead-bolt distance	56500	0,300	1	1	06221	01	0	
	- Nickel-plated steel faceplate 28 mm. dead-bolt distance	17500	0,275	1	1	06221	10	0	
	- Nickel-plated steel faceplate 28 mm. dead-bolt distance	15500	0,295	1	1	06221	11	0	
	- Nickel-plated steel faceplate 28 mm. dead-bolt distance	1 87515 28 0	0,297	1	1	06221	15	0	

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	- Nickel-plated steel faceplate 28 mm. dead-bolt distance	1 86515 28 0	0,297	1	1 06221 16 0				
	- Nickel-plated steel faceplate 28 mm. dead-bolt distance	1 86515 38 0	0,297	1	1 06221 17 0				
	- Nickel-plated steel faceplate 28 mm. dead-bolt distance	57715, 57716, 57735, 57736	0,380	6	1 06221 50 0				
	- Nickel-plated steel faceplate 28 mm. dead-bolt distance	56765, 56766, 56785, 56786	0,380	6	1 06221 51 0				
 	Nylon slide	15000, 17000	0,003	1	1 06224 50 0				
	- Bush for latchbolt guide - For electrical locks		0,003	1	1 06224 60 0				
	- Nickel-plated steel cover plate - For electric locks with 28 mm. dead-bolt distance		0,023	1	1 06228 08 0				
	- Nickel-plated steel cover plate - For 28 mm. dead-bolt distance		0,024	25	1 06228 28 0				
	Steel spring rod for floor bolt item 1.06425.00.0	1 06425 00 0	0,221	12	1 06291 50 0				

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	• Pair of zinc plated steel diverting devices • For mortice locks		0,128	6	1 06418 01 0				
	• Pair of zinc plated steel diverting devices • For mortice locks		0,047	6	1 06418 03 0				
	• Opening limiting device chain • For double hole locks with opening limiting device		0,120	0	1 06421 10 1				
	• Set of zinc plated extended bolts • For rim locks pre-arranged for additional locking points		1,500	1	1 06425 02 0				
	• Set of zinc plated extended bolts • For rim locks pre-arranged for additional locking points		1,435	1	1 06425 03 0				

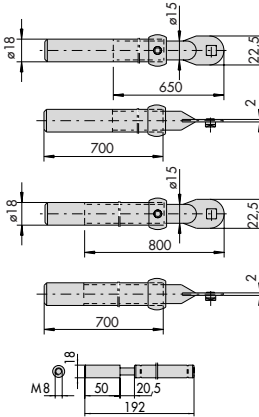Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	- Set of zinc plated steel connecting bars - For rim locks pre-arranged for additional locking points		1,300	1	1 06425 04 0				
	- Top and bottom extended bolts for use with rekeyable locks (lower spring rod) - For rim locks pre-arranged for additional locking points		1,610	1	1 06425 05 0				
	- Zinc plated side bolt (single) - S = 3,5 mm. - For rim locks pre-arranged for additional locking points		0,455	1	1 06433 00 0				
	- Zinc plated side bolt (single) - S = 43,5 mm. - For rim locks pre-arranged for additional locking points		0,510	1	1 06433 10 0				
	- Zinc plated side bolt (double) - S = 3,5 mm. - For rim locks pre-arranged for additional locking points		0,855	1	1 06433 01 0				
	- Zinc plated side bolt (double) - S = 4,5 mm. - For rim locks pre-arranged for additional locking points		0,990	1	1 06433 11 0				

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	• Zinc plated side bolt (single) • For mortice locks pre-arranged for additional locking points		0,646	1	1	06434	00	0	
	• Zinc plated side bolt (double) • For mortice locks pre-arranged for additional locking points		1,000	1	1	06434	01	0	
	• Zinc plated side bolt (single) • For rim locks pre-arranged for additional locking points		0,448	1	1	06437	00	0	
	• Zinc plated side bolt (double) • For rim locks pre-arranged for additional locking points		0,789	1	1	06437	01	0	
	• Pair of nylon electric contacts	15000, 17000	0,029	6	1	06510	10	0	
	• Concealed cable guard with spring	15000, 17000	0,170	6	1	06515	00	0	
	• Concealed cable guard with spring		0,325	6	1	06515	15	0	

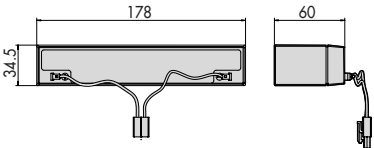Type	Description	For series/item	 Kg Unit weight	 Pieces	ITEM			
					Type	Dim.	Hand	Perf. Spec.
	• Battery (lead) 12V 2.3 ah		0,492	1	1 06740 00 0			
	• 40 VA 12V ac transformer		0,492	1	1 07060 01 0			
	• Set of coils • 12 V ac CE	14350, 14351, 14352, 14450, 14451, 14452, 14460, 14461, 14462, 14510, 14511, 14512, 15500, 16000, 17500, 18000	0,035	6	1 07086 00 0			
	• Set of coils • 24 V ac CE	14350, 14351, 14352, 14450, 14451, 14452, 14460, 14461, 14462, 14510, 14511, 14512, 15500, 16000, 17500, 18000	0,035	6	1 07086 01 0			