

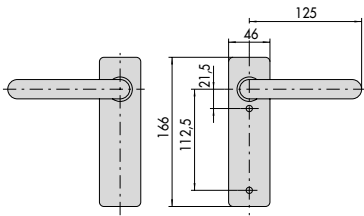
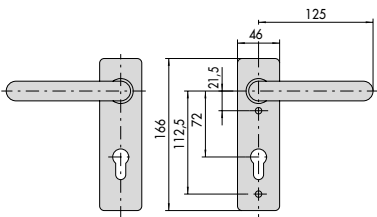



























Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Pers. Spec.
	• Set of plates with cylinder hole	43000, 43020	0,200	6	1 07070 12 0			
	• Set of plates with fixed handle knob and cylinder hole	43000, 43020, 43025	0,340	6	1 07070 14 0			
	• Set of plates with handles	43000, 43020, 43025	0,410	6	1 07070 15 0			
	• Set of plates with handles and cylinder hole	43000, 43020, 43025	0,679	6	1 07070 16 0			
	• Cylinder adaptor for bit keys (patent type) • SUPPLIED AS STANDARD: Bitting key Fixing screws 2 nylon escutcheons with plug, to be combined with handles series 1.07070.12/14/16	43000, 43020, 43025	0,066	6	1 07071 10 0			
	• Zinc plated steel striker	43000, 43100	0,050	20	1 07073 20 0			

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	• Outside plate for reinforced assembly • To be combined with panic exit devices series 59600 and 59710 with distance 72 mm	43110, 43115, 43120, 43130	0,204	6	1	07076	11	0	
	• Outside plate with fixed knob • To be combined with panic exit devices series 59600 and 59710 with distance 72 mm	43110, 43115, 43120, 43130	0,160	6	1	07076	13	0	
	• Outside plate with fixed knob and cylinder hole • To be combined with panic exit devices series 59600 and 59710 with distance 72 mm	43110, 43115, 43120, 43130	0,160	6	1	07076	14	0	
	• Outside plate with handle • To be combined with panic exit devices series 59600 and 59710 with distance 72 mm	43110, 43115, 43120, 43130	0,250	6	1	07076	15	0	
	• Outside plate with handle and cylinder hole • To be combined with panic exit devices series 59600 and 59710 with distance 72 mm	43110, 43115, 43120, 43130	0,400	6	1	07076	16	0	
	• Black painted inside plate • To be combined with locks with distance 72 mm	59710	0,250	6	1	07076	60	0	
	• Inside plate • PVD treated satin lacquered stainless steel • May be assembly with locks 72 mm centre distance	59710	0,250	6	1	07076	60	0 C2	
	• Black painted inside plate with cylinder hole • To be combined with locks with distance 72 mm	59710	0,117	6	1	07076	61	0	
	• Inside plate • PVD treated satin lacquered stainless steel • May be assembly with locks 92 mm centre distance	59710	0,117	6	1	07076	61	0 C2	

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	- Black painted inside plate - May be assembly with locks 72 mm centre distance	59321, 59371	0,250	1	1	07076	65	0	
	- Black painted inside plate - May be assembly with locks 92 mm centre distance	59321, 59371	0,250	1	1	07076	66	0	
	- Black painted steel extended bolts - For use with: Panic exit devices series 59646, 59647	1 07063 00 0, 1 07063 10 1, 1 07063 10 2	1,130	1	1	07081	12	0	
	• Steel split splindle		0,060	6	1	07083	50	0	
	• Steel split splindle		0,060	6	1	07083	51	0	
	• Steel split splindle		0,060	6	1	07083	52	0	
	• Steel split splindle		0,060	6	1	07083	53	0	
	• Steel spindle		0,030	6	1	07083	70	0	

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	- Closing selector for double doors with door closer - Chrome-plated steel - CE mark in compliance with the directive 89/106/CEE issued by ICIM		0,702	1	1	07084	10	0	
	- Closing selector for double doors with door closer - Stainless steel - CE mark in compliance with the directive 89/106/CEE issued by ICIM - Voluntary ICIM certification issued by third party as provided for in the same UNI EN 1158 standard		0,702	1	1	07084	20	0	
	- Adjustable closing selector for double doors with door closer - Chrome-plated steel - CE mark in compliance with the directive 89/106/CEE issued by ICIM		0,702	1	1	07084	11	0	
	- Adjustable closing selector for double doors with door closer - Chrome-plated steel - CE mark in compliance with the directive 89/106/CEE issued by ICIM - Voluntary ICIM certification issued by third party as provided for in the same UNI EN 1158 standard		0,702	1	1	07084	21	0	
	Steel spindle		0,060	1	1	07085	75	0	
	Steel spindle		0,060	1	1	07085	76	0	
	Automatic dogging device, steel	43090, 43190, 43690	0,060	3	1	07089	50	0	
	Open door indicator	07074	0,005	1	1	07126	01	0	

Type	Description	For series/item			ITEM			
			Unit weight	Pieces	Type	Dim.	Hand	Pers. Spec.
	• Steel spacer • Can be combined with touch-bar panic device	07074	0,200	1	1 07126 50 0			