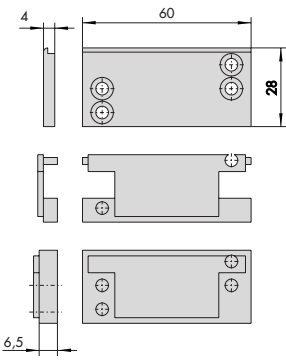






















Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	Nylon roller insert	1 06463 04 0,	0,004	12	1	06141 70 0			
		1 06463 06 0,							
		1 06463 07 0,							
		1 06463 14 0,							
		1 06463 16 0,							
		1 06463 17 0,							
		1 06465 04 0,							
		1 06465 06 0,							
		1 06465 07 0							
	- Upper striker for extended bolt - Black nylon	1 07089 52 0	0,022	25	1	06141 80 0			
	- Spacer for outside operation devices - Black nylon - pz. 1 S = 1,2 mm - pz. 1 S = 3 mm pz. 1 S = 4 mm	1 07077 28 0,	0,019	1	1	06141 97 0			
		1 07077 29 0							
	- Spacer for outside operation devices - Black nylon - pz. 1 S = 1,2 mm - pz. 1 S = 3 mm - pz. 1 S = 4 mm	1 07077 38 0,	0,019	1	1	06141 98 0			
		1 07077 39 0,							
		1 07077 40 0							
	- Spacer for outside operation devices - Black nylon - pz. 1 S = 1,2 mm - pz. 1 S = 3 mm - pz. 1 S = 4 mm	1 07077 46 0,	0,019	1	1	06141 99 0			
		1 07077 47 0,							
		1 07077 48 0,							
		1 07077 49 0							
	- Microswitch to be used with outside operation devices item 1.07077.46.0, 1.07077.48.0 - Microswitch to be used with panic exit devices series 59605, 59615 - Microswitch to be used with outside operation devices item 1.07077.49.0 - Microswitch to be used with panic exit devices series Touch Bar - SBLOCK - Microswitch to be used with panic exit devices series NEW EUROPA		0,020	1	1	06195 00 0			


Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	Microswitch to be used with panic exit devices series PRESTIGE		0,020	1	1 06195 07 0				
	Hold-open device	59800, 59810, 59815	0,080	1	1 07065 50 0				
	- Hold-open device - Hold open device for NEW EUROPA series of panic devices - Casing with glazed stainless steel PVD coating	59000, 59010, 59015	0,080	1	1 07065 51 0				
		59000, 59010, 59015	0,080	1	1 07065 51 0 C2				
	Hold-open device	59301, 59311, 59316, 59351, 59361, 59366	0,080	1	1 07065 52 0				
	Coil set 12 V ac	1 07083 15 0, 1 07083 25 0, 1 07083 65 0	0,047	1	1 07067 10 0				
	Coil set 12 V ac	1 07083 16 0, 1 07083 66 0	0,047	1	1 07067 11 0				
	Coil set 24 V ac	1 07083 17 0, 1 07083 67 0, 1 07083 77 0	0,047	1	1 07067 12 0				
	Coil set 12 V ac	1 07083 76 0	0,047	1	1 07067 13 0				
	Coil set 12 V ac	1 07083 35 0	0,047	1	1 07067 14 0				
	Coil set 24 V ac	1 07083 36 0	0,047	1	1 07067 15 0				
	- Top and lateral striker with spacers - Black painted steel	1 07063 01 0, 1 07063 11 0, 59120, 59121, 59123, 59125, 59126, 59130, 59131, 59135, 59136, 59143, 59160, 59185, 59222, 59243, 59646, 59695	0,060	1	1 07072 11 0				

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	• Lateral striker for metal sections • Black painted alloy	07063, 59000, 59800	0,090	1	1 07072 14 0				
	• Black painted striker, complete with spacers • Stainless steel striker, complete with spacers, for inox and pvd panic exit devices	1 07063 20 0, 1 07063 30 0, 1 07063 35 1, 1 07063 35 2, 1 07063 50 0, 1 07063 60 0, 1 07063 65 1, 1 07063 65 2, 59010, 59015, 59311, 59316, 59800, 59810	0,080	1	1 07072 20 0				
		1 07063 20 0, 1 07063 30 0, 1 07063 35 1, 1 07063 35 2, 1 07063 50 0, 1 07063 60 0, 1 07063 65 1, 1 07063 65 2, 59000, 59010, 59311, 59316, 59800, 59810	0,080	1	1 07072 70 0				
	• Black painted striker, complete with spacers • Stainless steel striker, complete with spacers, for inox and pvd panic exit devices	1 07063 20 0, 1 07063 30 0, 1 07063 35 1, 1 07063 35 2, 1 07063 50 0, 1 07063 60 0, 1 07063 65 1, 1 07063 65 2, 59010, 59015, 59311, 59316, 59800, 59810	0,080	1	1 07072 21 0				
		1 07063 20 0, 1 07063 30 0, 1 07063 35 1, 1 07063 35 2, 1 07063 50 0, 1 07063 60 0, 1 07063 65 1, 1 07063 65 2, 59000, 59010, 59311, 59316, 59800, 59810	0,080	1	1 07072 71 0				

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	• Black painted striker, complete with spacers	1 07063 40 0, 1 07063 70 0	0,080	1	1 07072 25 0				
	• Stainless steel striker, complete with spacer	1 07063 41 0, 1 07063 70 0	0,080	1	1 07072 75 0				
	• Black painted striker, complete with spacers	1 07063 40 0, 1 07063 70 0	0,080	1	1 07072 26 0				
	• Stainless steel striker, complete with spacer	1 07063 41 0, 1 07063 70 0	0,080	1	1 07072 76 0				
	• Stainless steel striker, complete with spacer	1 07063 30 0, 1 07063 60 0	0,080	1	1 07072 27 0				
	• Stainless steel striker, complete with spacers • For inox and PVD panic exit devices	1 07063 31 0, 1 07063 60 0 C2	0,080	1	1 07072 77 0				
	• Black painted steel floor striker, complete with spacers	1 07063 30 0, 1 07063 60 0	0,100	1	1 07072 28 0				
	• Stainless steel floor striker, complete with spacers • For inox and PVD panic exit devices	1 07063 31 0, 1 07063 60 0 C2	0,100	1	1 07072 78 0				
	• Top and lateral striker for PVC sections • Black nylon	59300, 59315, 59318	0,020	1	1 07072 30 0				
	• Outside plate • Black painted steel	59301, 59311, 59316	0,200	1	1 07077 14 0				
	• Outside plate • PVD treated satin lacquered stainless steel	59351, 59361, 59366	0,200	1	1 07077 14 0 C2				


Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	• Outside plate • Black painted steel	59301, 59311, 59316	0,200	1	1	07077	15	0	
	• Outside plate • PVD treated satin lacquered stainless steel	59351, 59361, 59366	0,200	1	1	07077	15	0	C2
	• Closing selector for double doors with door closer • Chrome-plated steel • CE mark in compliance with the directive 89/106/CEE issued by ICIM		0,702	1	1	07084	10	0	
	• Closing selector for double doors with door closer • Stainless steel • CE mark in compliance with the directive 89/106/CEE issued by ICIM • Voluntary ICIM certification issued by third party as provided for in the same UNI EN 1158 standard		0,702	1	1	07084	20	0	
	• Adjustable closing selector for double doors with door closer • Chrome-plated steel • CE mark in compliance with the directive 89/106/CEE issued by ICIM		0,702	1	1	07084	11	0	
	• Adjustable closing selector for double doors with door closer • Chrome-plated steel • CE mark in compliance with the directive 89/106/CEE issued by ICIM • Voluntary ICIM certification issued by third party as provided for in the same UNI EN 1158 standard		0,702	1	1	07084	21	0	
	• Spacer 2 mm. • Black nylon	1 07083 15 0, 1 07083 16 0, 1 07083 17 0, 1 07083 65 0, 1 07083 66 0, 1 07083 67 0, 1 07083 76 0, 1 07083 77 0	0,020	1	1	07089	02	0	

Type	Description	For series/item	Unit weight 	Pieces 	ITEM			
					Type	Dim.	Hand	Pers. Spec.




- Steel dogging device, complete with:
Spacers item 1.06141.81.0
Upper striker item 1.06141.80.0

43290 0,060 1 1 07089 52 0



- Adapteur for round cylinder
- For Touch-bar series panic exit devices

59800, 59810 0,030 1 1 07165 20 0



- Adapteur for round cylinder
- For Touch-bar series panic exit devices

59301, 59311, 59351, 59361 0,030 1 1 07165 21 0