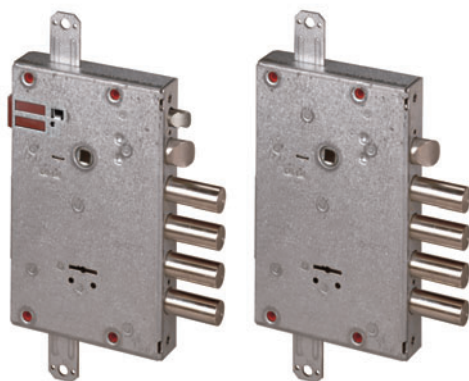


**Technical features:**

- The NEW CAMBIOFACILE system allows to re-key the lock by using a special re-keying tool and the keys, so that it is not necessary to disassemble the lock or any of its parts
- Zinc plated steel case
- Nickel-plated reversible latch
- Nickel-plated, steel dead-bolts
- Pre-arranged for additional locking points
- Packing: 1 or 5 pcs. (industrial wrapping)

Supplied as standard:

- Keys
- Re-keying tool
- Key guide item 1.06142.01.0
- Inside escutcheon item 1.06143.00.0
- Outside escutcheon item 1.06082.00.0

Hand:


A = Non-handed

Operation:


- VERSION WITH CONSTRUCTION KEY: the key operates the 4 throws

New CAMBIOFACILE

Type	Description	Key item	DEAD-BOLTS								ITEM				
			No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	Type	Dim.	Hand	Pers. Spec.





- Dead-bolt and latch
- Electrically controlled dead-locking latch
- 12 V ac CE
- Slide item 1.06224.50.0




4	3,5	25	4	85	64	2,650	1	1 17615 25 A
4	3,5	27	4	85	64	2,650	1	1 17615 27 A
4	3,5	28	4	85	64	2,650	1	1 17615 28 A
3	3,5	32	4	85	64	2,650	1	1 17615 32 A
3	3,5	38	4	85	64	2,650	1	1 17615 38 A
4	3,5	25	4	85	64	2,350	5	1 17615 45 A
4	3,5	27	4	85	64	2,350	5	1 17615 47 A
4	3,5	28	4	85	64	2,350	5	1 17615 48 A
3	3,5	32	4	85	64	2,350	5	1 17615 52 A
3	3,5	38	4	85	64	2,350	5	1 17615 58 A


- CONSTRUCTION KEY VERSION
- Dead-bolt and latch
- Electrically controlled dead-locking latch
- 12 V ac CE
- Slide item 1.06224.50.0





4	3,5	25	4	85	64	2,750	1	1 17665 25 A
4	3,5	27	4	85	64	2,750	1	1 17665 27 A
4	3,5	28	4	85	64	2,750	1	1 17665 28 A
3	3,5	32	4	85	64	2,750	1	1 17665 32 A
4	3,5	38	3	85	64	2,750	1	1 17665 38 A
4	3,5	25	4	85	64	2,450	5	1 17665 45 A
4	3,5	27	4	85	64	2,450	5	1 17665 47 A
4	3,5	28	4	85	64	2,450	5	1 17665 48 A
3	3,5	32	4	85	64	2,450	5	1 17665 52 A
3	3,5	38	4	85	64	2,450	5	1 17665 58 A



- Dead-bolt only



5	3,5	25	4	85	64	2,450	1	1 57605 25 A
5	3,5	27	4	85	64	2,450	1	1 57605 27 A
5	3,5	28	4	85	64	2,450	1	1 57605 28 A
4	3,5	32	4	85	64	2,450	1	1 57605 32 A
4	3,5	38	4	85	64	2,450	1	1 57605 38 A
5	3,5	25	4	85	64	2,150	5	1 57605 45 A
5	3,5	27	4	85	64	2,150	5	1 57605 47 A
5	3,5	28	4	85	64	2,150	5	1 57605 48 A
4	3,5	32	4	85	64	2,150	5	1 57605 52 A
4	3,5	38	4	85	64	2,150	5	1 57605 58 A

Type	Description	Key item	DEAD-BOLTS										ITEM					
			No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces		Type	Dim.	Hand	Fin.	Pers.	Spec.
	• CONSTRUCTION KEY VERSION • Dead-bolt only	 3 art. 1 00163 00 1  1 art. 1 00120 00 1 construction key	5	3,5	25	4	85	64	2,550	1	1	57655 25 A						
			5	3,5	27	4	85	64	2,550	1	1	57655 27 A						
			5	3,5	28	4	85	64	2,550	1	1	57655 28 A						
			4	3,5	32	4	85	64	2,550	1	1	57655 32 A						
			4	3,5	38	4	85	64	2,550	1	1	57655 38 A						
			5	3,5	25	4	85	64	2,250	5	1	57655 45 A						
			5	3,5	27	4	85	64	2,250	5	1	57655 47 A						
			5	3,5	28	4	85	64	2,250	5	1	57655 48 A						
			4	3,5	32	4	85	64	2,250	5	1	57655 52 A						
			4	3,5	38	4	85	64	2,250	5	1	57655 58 A						
	• Dead-bolt and latch	 3 art. 1 00163 00 1	4	3,5	25	4	85	64	2,600	1	1	57615 25 A						
			4	3,5	27	4	85	64	2,600	1	1	57615 27 A						
			4	3,5	28	4	85	64	2,600	1	1	57615 28 A						
			3	3,5	32	4	85	64	2,600	1	1	57615 32 A						
			3	3,5	38	4	85	64	2,600	1	1	57615 38 A						
			4	3,5	25	4	85	64	2,300	5	1	57615 45 A						
			4	3,5	28	4	85	64	2,300	5	1	57615 48 A						
			3	3,5	32	4	85	64	2,300	5	1	57615 52 A						
			3	3,5	38	4	85	64	2,300	5	1	57615 58 A						
				• CONSTRUCTION KEY VERSION • Dead-bolt and latch	 3 art. 1 00163 00 1  1 art. 1 00120 00 1 construction key	4	3,5	25	4	85	64	2,700	1	1	57665 25 A			
4	3,5	27				4	85	64	2,700	1	1	57665 27 A						
4	3,5	28				4	85	64	2,700	1	1	57665 28 A						
3	3,5	32				4	85	64	2,700	1	1	57665 32 A						
3	3,5	38				4	85	64	2,700	1	1	57665 38 A						
4	3,5	25				4	85	64	2,400	5	1	57665 45 A						
4	3,5	27				4	85	64	2,400	5	1	57665 47 A						
4	3,5	28				4	85	64	2,400	5	1	57665 48 A						
3	3,5	32				4	85	64	2,400	5	1	57665 52 A						
3	3,5	38				4	85	64	2,400	5	1	57665 58 A						