

**Technical features:**

- Operating voltage
 - 12V ac (item: 1.07074.50/52.0)
 - 12 V cc (item: 1.07074.60/62.0)
- Zinc plated steel case
- Painted aluminium case cover

Supplied as standard:

- Power cable
- Handle spindle 8/9
- Fixing screws
- Assembly instruction sheet

On request:

- Open door indicator led item 1-07126-00-0
- Metal spacer item 1.07126.50.0 for use with Touch-bar series panic exit devices


Finishes:

- Black case cover

Hand:

0 = Non-handed

Type	Description	 Unit weight	 Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.

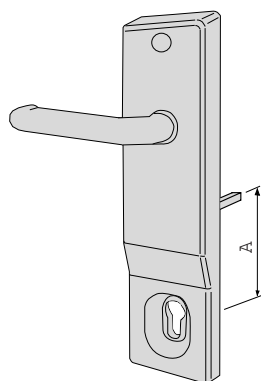

- VERSION WITH HOLD-OPEN CATCH MECHANISM
- To be used with series 43100 locks with handle/cylinder distance A=72 mm
- VERSION WITH HOLD-OPEN CATCH MECHANISM
- To be used with series 43200, 43600 locks with handle/cylinder distance A=92 mm
- VERSION WITHOUT HOLD-OPEN CATCH MECHANISM
- To be used with series 43100 locks with handle/cylinder distance A=72 mm
- VERSION WITHOUT HOLD-OPEN CATCH MECHANISM
- To be used with series 43200, 43600 locks with handle/cylinder distance A=92 mm

2,200 1 1 07074 50 0

2,605 1 1 07074 52 0

1,690 1 1 07074 60 0

1,690 1 1 07074 62 0