



**Cylinder to
be ordered
separately**

- Zinc plated steel faceplate
- Zinc plated steel case
- Zinc plated steel latch
- 9 mm. split follower
- Can be combined with the panic exit devices series 59600 and 59710




- Approved to MPA NRW, certificate N° P-12 0114 2 95

0 = Non-handed


423

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.

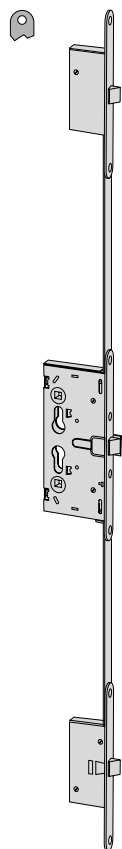


- Latches only
- 3 locking points
- OPERATION:
Inside: panic exit device and/or key
Outside: the key activates and disactivates handle and withdraws latches
Handle withdraws latches only if activated by the key

72	24	65	1,750	6	1 43115 65 0
----	----	----	-------	---	--------------



- FOR SECONDARY LEAF OF A DOUBLE DOOR
- A latch only lock to be installed on main leaf, item 1.43110.65.0 or 1.43115.65.0
- Rod extension 17 mm
- OPERATION:
Inside: panic exit device
- ON REQUEST:
Extended bolts item 1.07088.03.0
Automatic dogging device 1.07089.50.0

1	24	65	0,858	1	1 43190 65 0
1	24	95	1,000	1	1 43190 95 0



- FOR SECONDARY LEAF OF A DOUBLE DOOR
- DOUBLE FUNCTIONEMENT VERSION
- A latch only lock to be installed on main leaf, item 1.43110.65.0 or 1.43115.65.0
- Rod's forward stroke 17 mm
- OPERATION:
Inside: panic exit device
- ON REQUEST:
Extended bolts item 1.07088.03.0
Automatic dogging device 1.07089.50.0

1	24	65	0,858	1	1 43191 65 0
1	24	95	1,000	1	1 43191 95 0