

**Technical features:**

- 10 pins (6 active, 4 passive) key biting system
- brass body with segment pack extended through the entire length of the cylinder brass plugs
- self-lubricating sintered steel projecting DIN cam pins:
 - in wear resistant bronze
 - in hardened steel in first position
- drivers:
 - in brass
 - in hardened steel in first position
- phosphor bronze springs
- Flat reversible key
 - in a special brass alloy nickel plated
 - numbered on key head

Supplied as standard:

- 3 keys
- Code Card
- Fixing screw

On request:

- Key with long neck (pers. CL), with personalised plastic piece and profile (pers. CP)

Finishes:

- Standard: sanded brass (fin. 00)
- On request:
 - polished brass (fin. 66)
 - nickel plated brass (fin. 12)

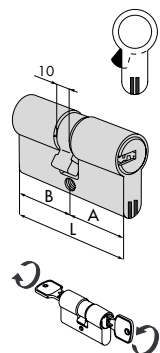
Standards:

- Compliant with EN 1303 norms:
 - Durability: grade 6
 - Security: grade 3

Patents:


- Utility model: B02003U000006 (Snap resistant Cylinder)


Type	Description	Comm. dim.				Key item			ITEM				
		L	A	B	Pins				Type	Dim.	Hand	Fin.	Pers. Spec.



• Clutching systems double cylinders

30 / 30	59,0	29,5	29,5	10	1	00620 01 0	0,234	12	1	0A3S1	07 0		
28 / 34	61,2	27,7	33,5	10	1	00620 01 0	0,234	12	1	0A3S1	06 0		
28 / 36	63,2	27,7	35,5	10	1	00620 01 0	0,234	12	1	0A3S1	09 0		
30 / 35	64,0	29,5	34,5	10	1	00620 01 0	0,243	12	1	0A3S1	26 0		
33 / 33	65,0	32,5	32,5	10	1	00620 01 0	0,234	12	1	0A3S1	10 0		
35 / 35	69,0	34,5	34,5	10	1	00620 01 0	0,234	12	1	0A3S1	13 0		
40 / 30	69,0	39,5	29,5	10	1	00620 01 0	0,234	12	1	0A3S1	12 0		
28 / 43	70,2	27,7	42,5	10	1	00620 01 0	0,234	12	1	0A3S1	11 0		
30 / 45	74,0	29,5	44,5	10	1	00620 01 0	0,243	12	1	0A3S1	27 0		
35 / 40	74,0	34,5	39,5	10	1	00620 01 0	0,243	12	1	0A3S1	28 0		
30 / 50	79,0	29,5	49,5	10	1	00620 01 0	0,234	12	1	0A3S1	17 0		
35 / 45	79,0	34,5	44,5	10	1	00620 01 0	0,234	12	1	0A3S1	19 0		
40 / 40	79,0	39,5	39,5	10	1	00620 01 0	0,234	12	1	0A3S1	18 0		
30 / 55	84,0	29,5	54,5	10	1	00620 01 0	0,304	12	1	0A3S1	33 0		
35 / 50	84,0	34,5	49,5	10	1	00620 01 0	0,319	12	1	0A3S1	31 0		
40 / 45	84,0	39,5	44,5	10	1	00620 01 0	0,319	12	1	0A3S1	30 0		
43 / 43	85,0	42,5	42,5	10	1	00620 01 0	0,304	12	1	0A3S1	46 0		
30 / 60	89,0	29,5	59,5	10	1	00620 01 0	0,304	12	1	0A3S1	20 0		
35 / 55	89,0	34,5	54,5	10	1	00620 01 0	0,304	12	1	0A3S1	32 0		
40 / 50	89,0	39,5	49,5	10	1	00620 01 0	0,319	12	1	0A3S1	21 0		
45 / 45	89,0	44,5	44,5	10	1	00620 01 0	0,319	12	1	0A3S1	29 0		
30 / 65	94,0	29,5	64,5	10	1	00620 01 0	0,319	6	1	0A3S1	41 0		
35 / 60	94,0	34,5	59,5	10	1	00620 01 0	0,304	6	1	0A3S1	38 0		
40 / 55	94,0	39,5	54,5	10	1	00620 01 0	0,319	6	1	0A3S1	42 0		
45 / 50	94,0	44,5	49,5	10	1	00620 01 0	0,304	6	1	0A3S1	39 0		
30 / 70	99,0	29,5	69,5	10	1	00620 01 0	0,349	6	1	0A3S1	24 0		
35 / 65	99,0	34,5	64,5	10	1	00620 01 0	0,319	6	1	0A3S1	22 0		
40 / 60	99,0	39,5	59,5	10	1	00620 01 0	0,349	6	1	0A3S1	25 0		
45 / 55	99,0	44,5	54,5	10	1	00620 01 0	0,349	6	1	0A3S1	43 0		
50 / 50	99,0	49,5	49,5	10	1	00620 01 0	0,319	6	1	0A3S1	23 0		
30 / 80	109,0	29,5	79,5	10	1	00620 01 0	0,349	6	1	0A3S1	37 0		
40 / 70	109,0	39,5	69,5	10	1	00620 01 0	0,349	6	1	0A3S1	35 0		
50 / 60	109,0	49,5	59,5	10	1	00620 01 0	0,319	6	1	0A3S1	36 0		
55 / 55	109,0	54,5	54,5	10	1	00620 01 0	0,319	6	1	0A3S1	70 0		
55 / 60	114,0	54,5	59,5	10	1	00620 01 0	0,349	6	1	0A3S1	71 0		
60 / 60	119,0	59,5	59,5	10	1	00620 01 0	0,349	6	1	0A3S1	40 0		

Type	Description	Comm. dim.				Key item			ITEM					
		L	A	B	Pins		Unit weight	Pieces	Type	Dim.	Hand	Fin.	Pers.	Spec.
 • Double cylinders with thumb turn shaft • ON REQUEST: KNOBS - item 1.06353.00 - item 1.06354.00	30 / 30	59,0	29,5	29,5	10	1 00620 01 0	0,275	12	1	0A3S2 07 0				
	30 / 35	64,0	29,5	34,5	10	1 00620 01 0	0,264	12	1	0A3S2 26 0				
	35 / 30	64,0	34,5	29,5	10	1 00620 01 0	0,264	12	1	0A3S2 81 0				
	33 / 33	65,0	32,5	32,5	10	1 00620 01 0	0,264	12	1	0A3S2 10 0				
	30 / 40	69,0	29,5	39,5	10	1 00620 01 0	0,264	12	1	0A3S2 82 0				
	35 / 35	69,0	34,5	34,5	10	1 00620 01 0	0,264	12	1	0A3S2 13 0				
	40 / 30	69,0	39,5	29,5	10	1 00620 01 0	0,264	12	1	0A3S2 12 0				
	35 / 40	74,0	34,5	39,5	10	1 00620 01 0	0,294	12	1	0A3S2 28 0				
	40 / 35	74,0	39,5	34,5	10	1 00620 01 0	0,294	12	1	0A3S2 83 0				
	30 / 50	79,0	29,5	49,5	10	1 00620 01 0	0,318	6	1	0A3S2 17 0				
	35 / 45	79,0	34,5	44,5	10	1 00620 01 0	0,318	6	1	0A3S2 19 0				
	40 / 40	79,0	39,5	39,5	10	1 00620 01 0	0,318	6	1	0A3S2 18 0				
	45 / 35	79,0	44,5	34,5	10	1 00620 01 0	0,318	6	1	0A3S2 85 0				
	40 / 45	84,0	39,5	44,5	10	1 00620 01 0	0,324	6	1	0A3S2 30 0				
	45 / 40	84,0	44,5	39,5	10	1 00620 01 0	0,324	6	1	0A3S2 84 0				
	50 / 35	84,0	49,5	34,5	10	1 00620 01 0	0,324	6	1	0A3S2 94 0				
	43 / 43	85,0	42,5	42,5	10	1 00620 01 0	0,324	6	1	0A3S2 46 0				
	30 / 60	89,0	29,5	59,5	10	1 00620 01 0	0,324	6	1	0A3S2 20 0				
	40 / 50	89,0	39,5	49,5	10	1 00620 01 0	0,324	6	1	0A3S2 21 0				
	45 / 45	89,0	44,5	44,5	10	1 00620 01 0	0,324	6	1	0A3S2 29 0				
	40 / 55	94,0	39,5	54,5	10	1 00620 01 0	0,367	6	1	0A3S2 42 0				
	45 / 50	94,0	44,5	49,5	10	1 00620 01 0	0,367	6	1	0A3S2 39 0				
	40 / 60	99,0	39,5	59,5	10	1 00620 01 0	0,370	6	1	0A3S2 25 0				
	45 / 55	99,0	44,5	54,5	10	1 00620 01 0	0,370	6	1	0A3S2 43 0				
	50 / 50	99,0	49,5	49,5	10	1 00620 01 0	0,370	6	1	0A3S2 23 0				
	45 / 60	104,0	44,5	59,5	10	1 00620 01 0	0,398	6	1	0A3S2 54 0				
	55 / 50	104,0	54,5	49,5	10	1 00620 01 0	0,398	6	1	0A3S2 64 0				
	30 / 80	109,0	29,5	79,5	10	1 00620 01 0	0,400	6	1	0A3S2 37 0				
	40 / 70	109,0	39,5	69,5	10	1 00620 01 0	0,400	6	1	0A3S2 35 0				
	50 / 60	109,0	49,5	59,5	10	1 00620 01 0	0,400	6	1	0A3S2 36 0				
	55 / 55	109,0	54,5	54,5	10	1 00620 01 0	0,400	6	1	0A3S2 70 0				
	60 / 50	109,0	59,5	49,5	10	1 00620 01 0	0,400	6	1	0A3S2 89 0				
	55 / 60	114,0	54,5	59,5	10	1 00620 01 0	0,415	6	1	0A3S2 71 0				
	55 / 65	119,0	54,5	64,5	10	1 00620 01 0	0,430	6	1	0A3S2 72 0				
	60 / 60	119,0	59,5	59,5	10	1 00620 01 0	0,430	6	1	0A3S2 40 0				
	65 / 55	119,0	64,5	54,5	10	1 00620 01 0	0,430	6	1	0A3S2 86 0				

 • Double cylinders with adjustable thumb turn shaft • to be combined with inside rose item 1.06458.20		30 / 30	59,0	29,5	29,5	10	1 00620 01 0	0,275	6	1	0A3S7 07 0				
		35 / 30	64,0	34,5	29,5	10	1 00620 01 0	0,275	6	1	0A3S7 81 0				
		40 / 30	69,0	39,5	29,5	10	1 00620 01 0	0,264	6	1	0A3S7 12 0				
		45 / 30	74,0	44,5	29,5	10	1 00620 01 0	0,264	6	1	0A3S7 91 0				
		50 / 30	79,0	49,5	29,5	10	1 00620 01 0	0,329	6	1	0A3S7 90 0				
		55 / 30	84,0	54,5	29,5	10	1 00620 01 0	0,359	6	1	0A3S7 92 0				
		60 / 30	89,0	59,5	29,5	10	1 00620 01 0	0,359	6	1	0A3S7 87 0				
		70 / 30	99,0	69,5	29,5	10	1 00620 01 0	0,370	6	1	0A3S7 88 0				